

# LDTV146 | LDTV152

46", 52" HDTV & DIGITAL COMPUTER MONITORS



*Leading the evolution of*  
**HIGH-DEFINITION**  
*Digital Signage*

[WWW.MITSUBISHI-PRESENTATIONS.COM](http://WWW.MITSUBISHI-PRESENTATIONS.COM)


# LDTV146 | LDTV152

## 46", 52" HDTV & DIGITAL COMPUTER MONITORS



	LDTV146	LDTV152
	46" LCD Monitor	52" LCD Monitor
NATIVE RESOLUTION	1920 x 1080	1920 x 1080
COMPUTER RESOLUTIONS SUPPORTED	VGA, WVGA, SVGA, WSVGA, XGA, PC 720p, WXGA, SXGA, PC 1080p, Digital Only	
BRIGHTNESS	500 Nits	500 Nits
VIEWING ANGLE	H: 176° V: 176°	H: 176° V: 176°
CONTRAST RATIO	>10,000:1	>10,000:1
WEIGHT (WITH BASE)	61.7 lbs.	72.8 lbs.
DIMENSION (W x H x D) (WITH BASE)	42" x 28" x 11.2"	47.7" x 31.2" x 14.1"
PIXEL PITCH	0.53	0.60
ESTIMATED BACKLIGHT LIFE	30,000 hrs.	30,000 hrs
FRAME REFRESH RATE	120 Hz	120 Hz
SIDE INPUTS	Side component/composite Combined Video Input, USB Photo Hub	
REAR INPUTS	A/V Inputs with S-Video (2), Component Video Inputs (1 Component/Composite combined), HDMI™ Inputs (x4)	
OUTPUT CONNECTORS	Stereo Audio Output, Digital Audio Output (Dolby® Digital / PCM), Subwoofer Preout, Infrared Emitters Internal Loudspeakers, 5 1/2" x 2 1/4" Speakers, 10W Output, 2 channels, Level Sound (dynamics limiter), Digital Output (PCM) for All Analog Sources	
AUDIO		
CONTROL INPUT	Mini D-sub 9pin (RS232C); Hexadecimal	
TUNING	Combined Tuner (Analog/Digital/Cable) In the clear, CableCard slot, Antenna (RF) Inputs (x2)	
USER CONTROLS	TV Guide Daily	TV Guide Daily
OPERATING POWER CONSUMPTION	315W	330W
REMOTE CONTROL	Yes	Yes
PLUG AND PLAY	Yes	Yes
VESA COMPATIBLE	Yes	Yes
POWER SUPPLY	110W, 60Hz	110W, 60Hz
CURRENT RATING	315W	330W
OPTIONAL ACCESSORIES	VESA Compliant wall mount or floor stands available upon request	
WARRANTY	1-Year Parts and Labor	

## Input Connections

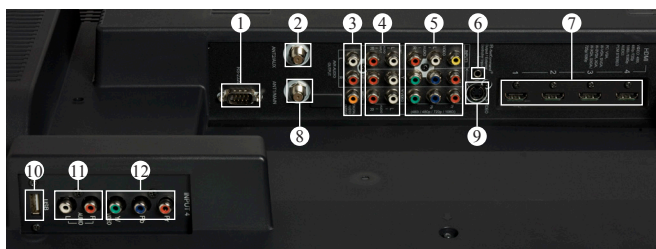

- RS232 Control**  
(mini D-Sub 9pin)
- ANT2/Aux**
- AUDIO OUT**  
Output the audio signal from the selected AUDIO IN Source
- AUDIO IN 1,2,3**  
Input audio signal from external equipment such as a DVD player HDTV device.
- VIDEO IN 1,2,3**  
VIDEO IN connector (RCA): Input a composite video signal.
- IR Net Command Input / Controller Input**
- HDMI In (x4)**  
Input HDMI from external equipment such as a DVD player HDTV device or Digital Computer Video
- ANT1/Main**
- S-VIDEO IN**  
S-VIDEO IN connector (DIN 4 pin): Input the S-Video (Y/C separate signal)
- USB**
- AUDIO IN**  
Input audio signal from external equipment such as a DVD player HDTV device.
- VIDEO IN**  
VIDEO IN connector (RCA): Input a composite video signal.



MITSUBISHI DIGITAL ELECTRONICS AMERICA, INC.  
Presentation Products Division  
Toll Free: 888.307.0349  
Email: [ppdinfo@mdea.com](mailto:ppdinfo@mdea.com)  
[www.mitsubishi-presentations.com](http://www.mitsubishi-presentations.com)

Canada  
Mitsubishi Electric Sales Canada Inc.  
Information Technologies Group  
Phone: 905.475.7728  
[www.mitsubishielecric.ca](http://www.mitsubishielecric.ca)

©2008 Mitsubishi Digital Electronics America, Inc. Standard features, options and specifications subject to change without notice. All other trademarks or registered trademarks are the property of their respective holders.

LITLDTV146152